


## Multi-Size High Pressure Pipe Plugs (Max back pressure 43 PSI & 144 PSI)



Engineered with Kevlar® and reinforced for higher back pressures. Five multi-size ranges available for sealing pipelines when back pressures exceed the operating range of our standard lightweight multi-size sealing plugs.  
 \*NR = Isoprene rubber, natural. SBR = Styrene-butadiene rubber

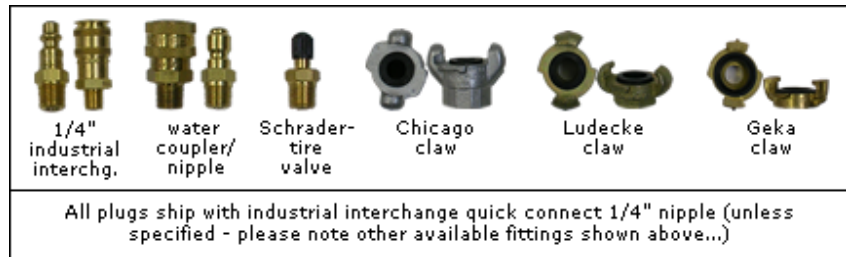

Maximum allowable backpressure for the following plugs is 43 PSI

<b>(SAE SIZES) HIGH BACK PRESSURE PIPE PLUGS 86 PSI (Plugy)</b>											
ITEM #	SIZE INCH	PIPE DIAMETER		PLUG SPECS (DEFLATED)			MAX BACK PRESSURE AIR PSI	BY-PASS SIZE INCH	INFLATION		EYE BOLT M THREAD
		MIN INCH	MAX INCH	DIAMETER INCH	CYLINDER LENGTH	PRODUCT WEIGHT			MAX PSI	VALVE TYPE	
60887	4"- 6"	4"	6"	3.6"	21.1"	2.7 lbs	43.2	N/A	86 PSI	1/4" Quick	6
60907	6"- 8"	6"	8"	5.6"	22.6"	4.4 lbs	43.2	N/A	86 PSI	1/4" Quick	8
60908	8"- 12"	8"	12"	7.6"	25"	7.1 lbs	43.2	N/A	86 PSI	1/4" Quick	8
60909	14"- 20"	14"	20"	12.7"	34.1"	19.1 lbs	43.2	N/A	86 PSI	1/4" Quick	8
60924	20"- 24"	20"	24"	18.6"	46.7"	39.6 lbs	43.2	N/A	86 PSI	1/4" Quick	10

Maximum allowable backpressure for the following plugs is 144 PSI

<b>(SAE SIZES) HIGH BACK PRESSURE PIPE PLUGS 173 PSI (Plugy)</b>											
ITEM #	SIZE INCH	PIPE DIA.		PLUG SPECS (DEFLATED)			MAX BACK PRESSURE AIR PSI	BY-PASS SIZE INCH	INFLATION		EYE BOLT M THREAD
		MIN INCH	MAX INCH	DIA INCH	CYLINDER LENGTH	PRODUCT WEIGHT			MAX PSI	VALVE TYPE	
518561	4"- 5 "	4"	5"	3.6"	21.1"	3.3 lbs	144	N/A	172.8 PSI	1/4" Quick	6
518562	6"	6"	6"	5.6"	22.6"	5.9 lbs	144	N/A	172.8 PSI	1/4" Quick	8
518563	8"- 10 "	8"	10"	7.6"	25"	9.5 lbs	144	N/A	172.8 PSI	1/4" Quick	8
518564	12"- 14 "	12"	14"	10.9"	26.8"	17.6 lbs	144	N/A	172.8 PSI	1/4" Quick	8
518565	16"	16"	16"	12.7"	34.1"	25.3 lbs	144	N/A	172.8 PSI	1/4" Quick	10
518566	20"	20"	20"	18.6"	46.7"	53 lbs	144	N/A	172.8 PSI	1/4" Quick	10

Available accessories for these products:

Protective Sleeves



Protective Sleeves Available for plug sizes:

- 8" - 16"
  - 14" - 24"
  - 15" - 30"
  - 20" - 40"
  - 24" - 48"
  - 30" - 60"
- 3/16" thickness**
- (1/4" thick)**



Remote Placement Adapters

Part #	Description	Weight
503403	Fits 4"-8" Plug	2 Lbs
503404	Fits 6"-12" / 8"-16" / 12"-21" Plug	2 Lbs
503407	Fits 14"-24" / 15"-30" Plug	5 Lbs
130-6	8'-20' Telescope pole (aluminum)	5 Lbs

Inflation Hoses



3/8"ID all-weather inflation hoses. Weather stability from -40F to +212F, also resistant to oil & fuel degradation & remains flexible in low temperatures. Fiber reinforcement braid insures minimum burst pressure of 1,000 PSI.

Item#	Length	Fittings	Color
77682S16	16'	SAE	Yellow
77682S32	32'	SAE	Yellow
76683S16	16'	SAE	Red
76683S32	32'	SAE	Red
77679S16	16'	SAE	Blue
77679S32	32'	SAE	Blue
77680S16	16'	SAE	Green
77680S32	32'	SAE	Green
77678S16	16'	SAE	Black
77678S32	32'	SAE	Black

Inflation/Lift Hoses

Lift hose shown here with inline gauge (not included)



Inflation / Lift Hose. Custom fitted with gauges, dump valves, over inflation relief valves, etc. (please specify requirements).

Standard inclusions: polypropylene braided sheathing with aluminum alloy attachment carabineers, nickel plated, brass 1/4" quick-connect/ disconnect coupling and nipple with stainless steel bearings for long service life. Solid machined stainless steel couplers available on request.

\*Custom fittings and gauges extra (please call for price)

Part#	Length	I.D.	Weight
60957	16'	5/16"	2 lbs
60958	32'	5/16"	4 lbs